

# 40008 40mm高脚限温阀芯

## 40mm high base with hot water limiter cartridge

### 阀芯技术参数

#### Technical Characteristics of The Cartridge

开启角度：23°      旋转角度：110°      最高使用温度：90°C  
 Max On/Off angel : 23°      Max Cold/Hot turning angel : 110°      Max temperature : 90°C

建议锁紧力矩：10~15Nm      冷热操作力矩：0.2~0.4Nm (任何水温)

Tightness of hex nut torque : 10~15Nm

Cold / Hot operation torque : 0.2~0.4Nm  
(Under any water temp)

开关操作力矩：0.15~0.35Nm (任何水温)

On/Off operation torque : 0.15~0.35Nm  
(Under any water temp)

阀芯破坏强度：≥15Nm

Broken torque : ≥15Nm

爆破压：≥35bar

Burst pressure : ≥35bar

3bar水压下流量值：≥28L/min

Flow rate at 3bar : ≥28L/min

寿命测试：EN817:2008 280,000cycles  
 ASME A 112.18.1-2008 2,000,000cycles

Life cycle test : EN817:2008 280,000cycles  
 ASME A 112.18.1-2008 2,000,000cycles



### 认证

#### Certification




Certified to NSF/ANSI 61-G

DVGW/KTW



ACS

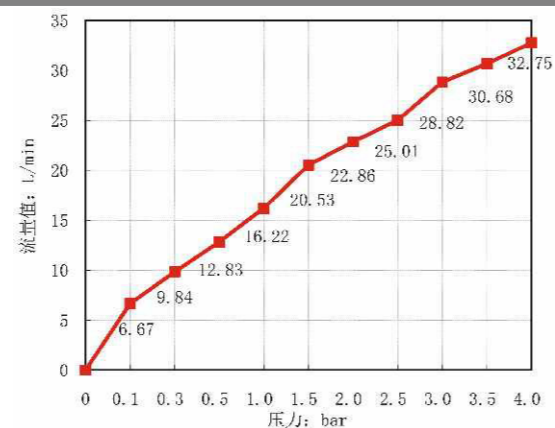

流量图  
Flow Rate Curves



### 限温

With hot water limiter


满足您对水龙头安全舒适的用水需求  
 In YJ Cartridge we make cartridges right

### 安装尺寸图

#### Drawings of Mounting Dimensions

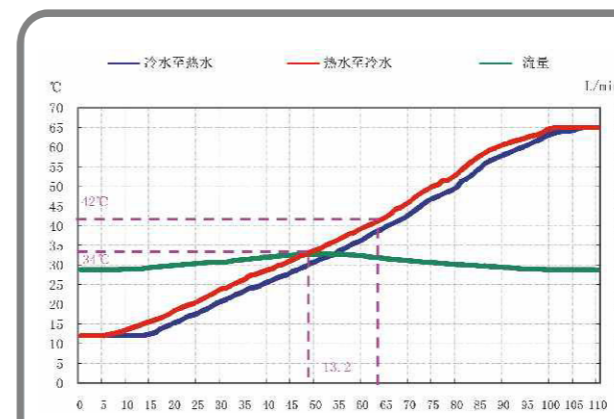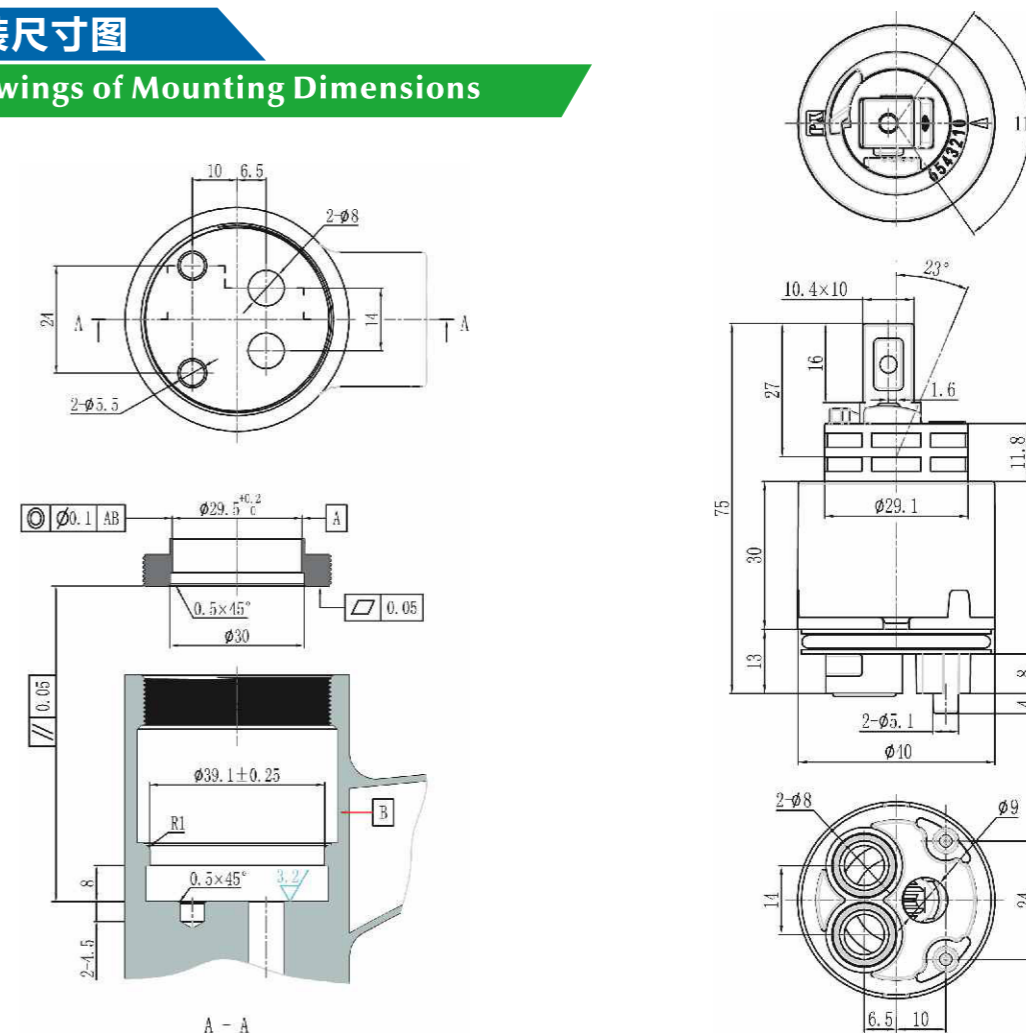

灵敏度图  
Sensitivity Curves

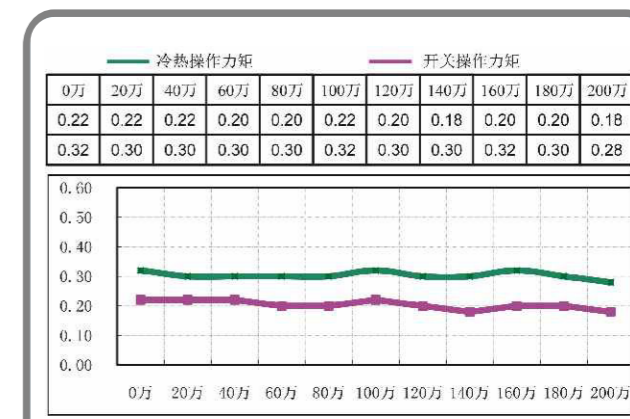

寿命测试与操作力矩图  
Life test and Operation torque Curves